



## Installation instruction for fabric roller blinds on the roof windows.

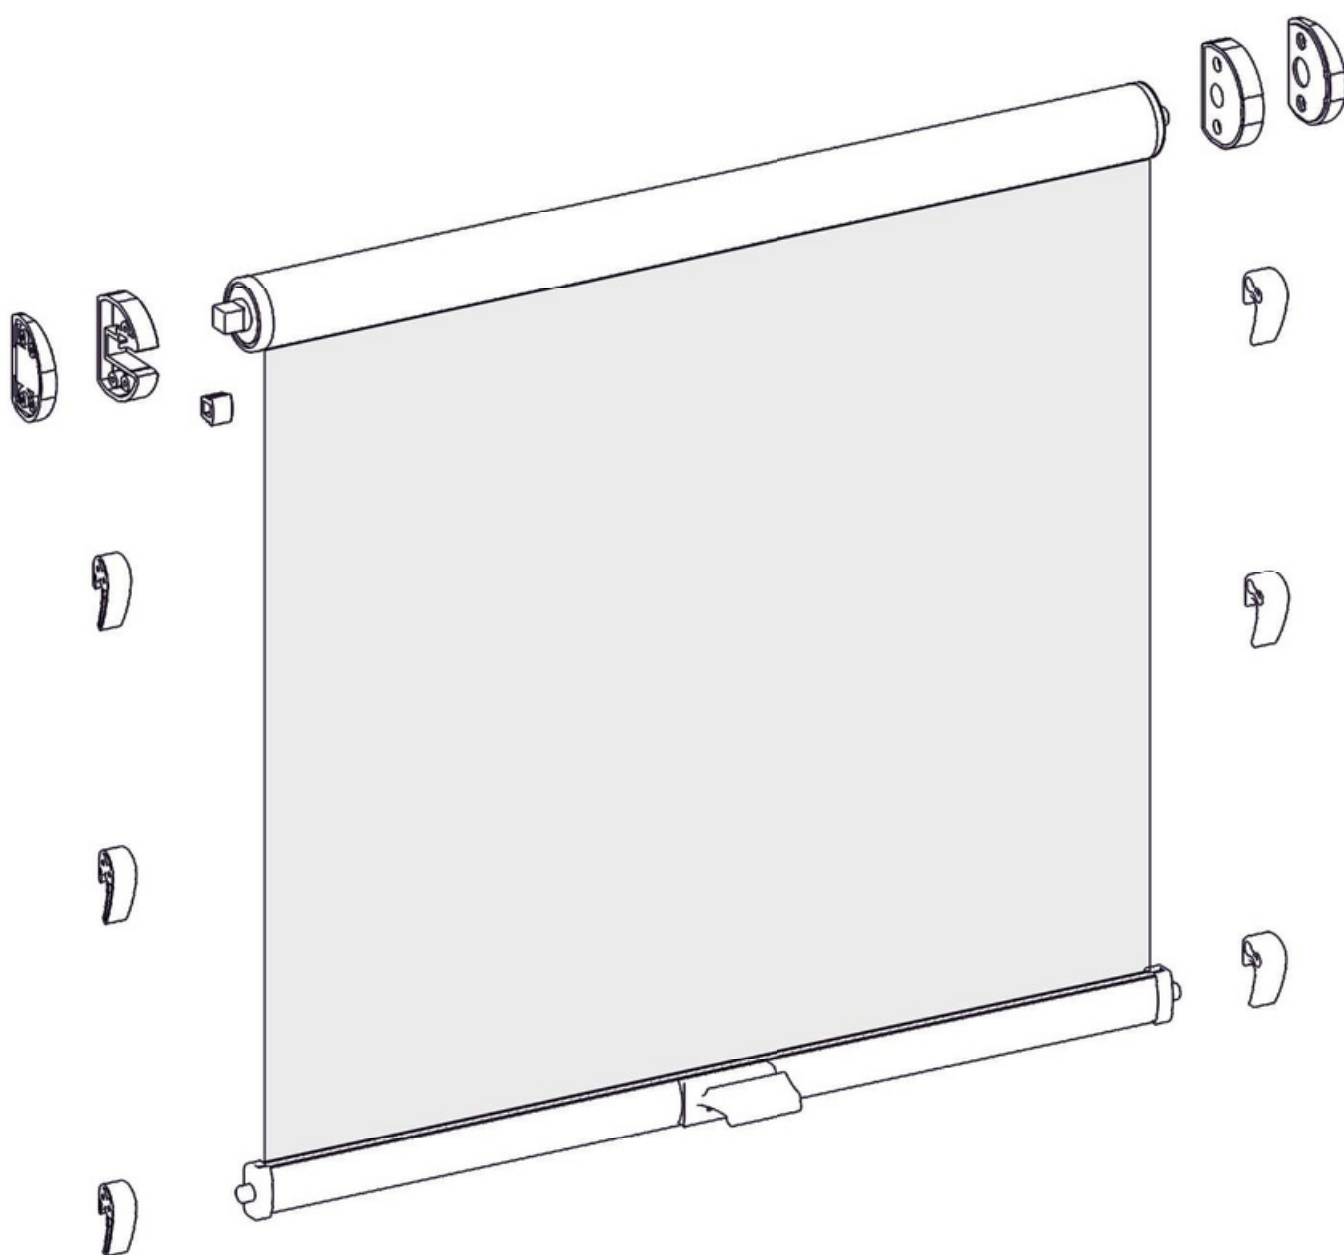


The following components are included with the shutter:

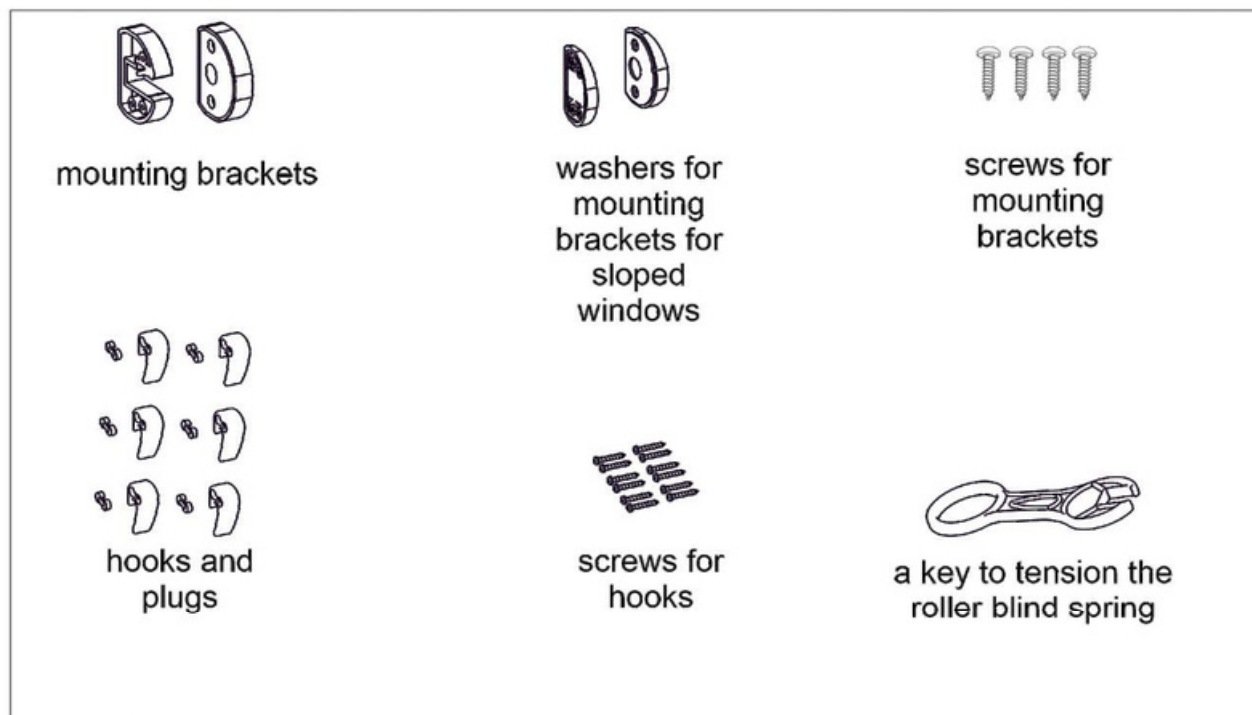


### Step 1


Screw on the mounting brackets. If the window frame has a slant, use washers for the mounting brackets. If the window frame doesn't have a slant, do not use washers.

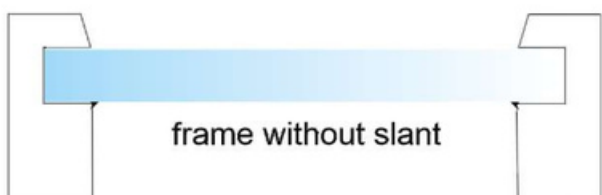


Mounting brackets on the left side of the window





Mounting brackets on the right side of the window



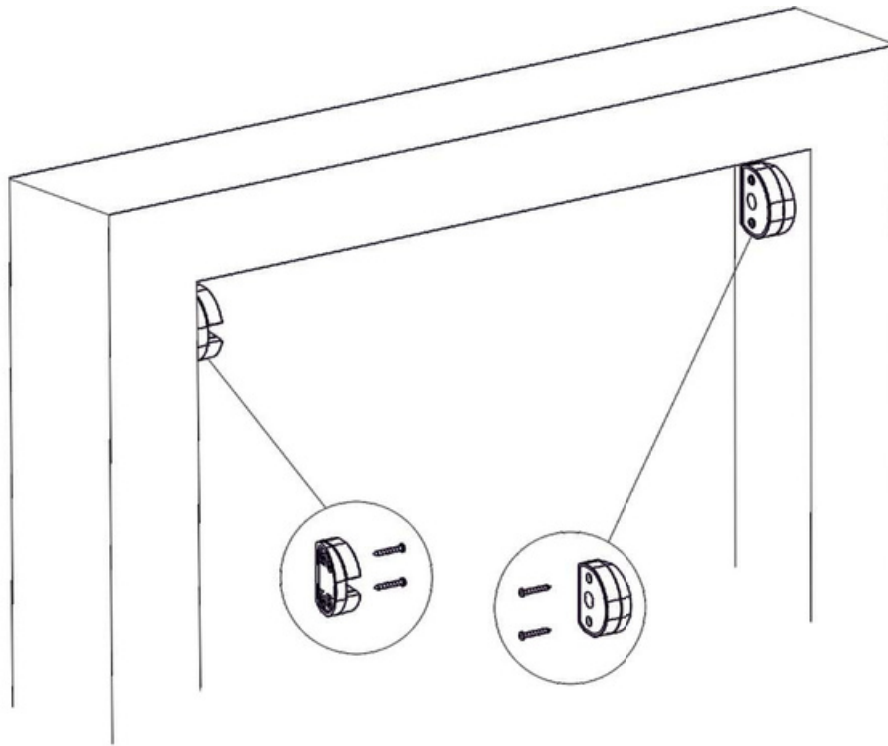


**Step II**  
Unpack the blind and use the spring tensioning key to turn 12 clockwise turns.

Holding the key on the stretched spring, first slide the blind into the right handle and then into the left one while removing the key.

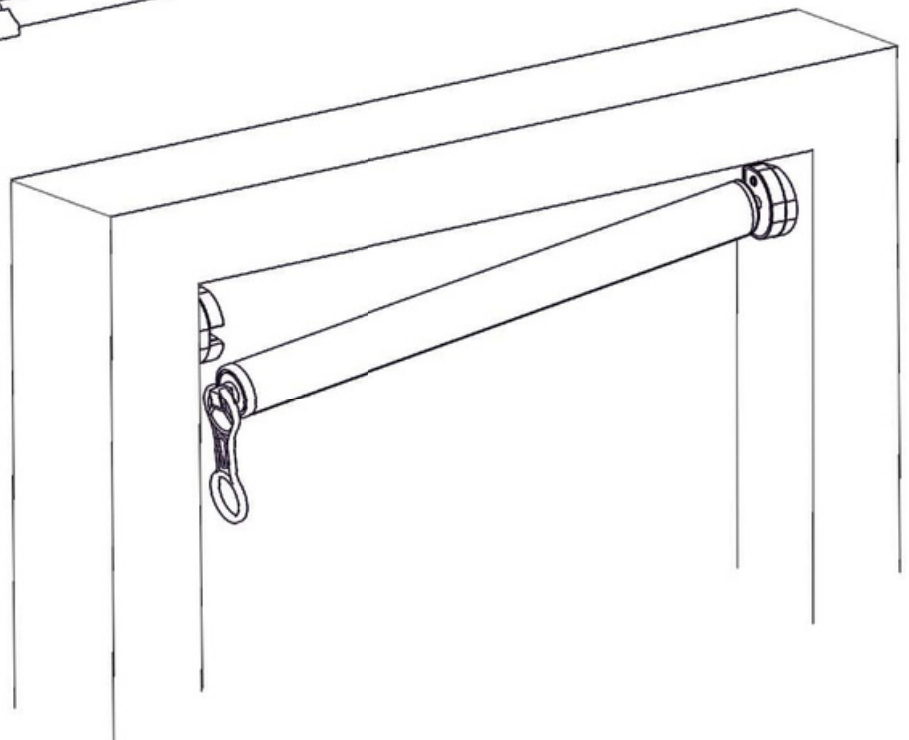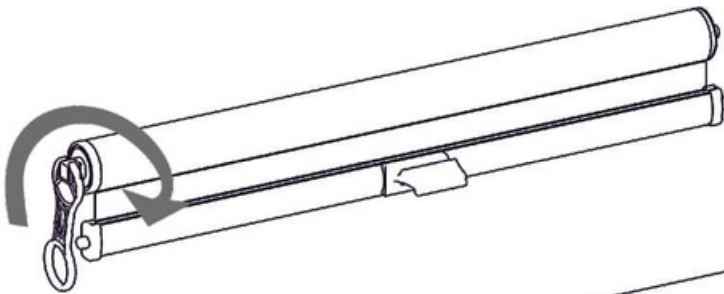



### Step III

After installing the blind in the holders insert the handle plug to prevent the blind from falling out.

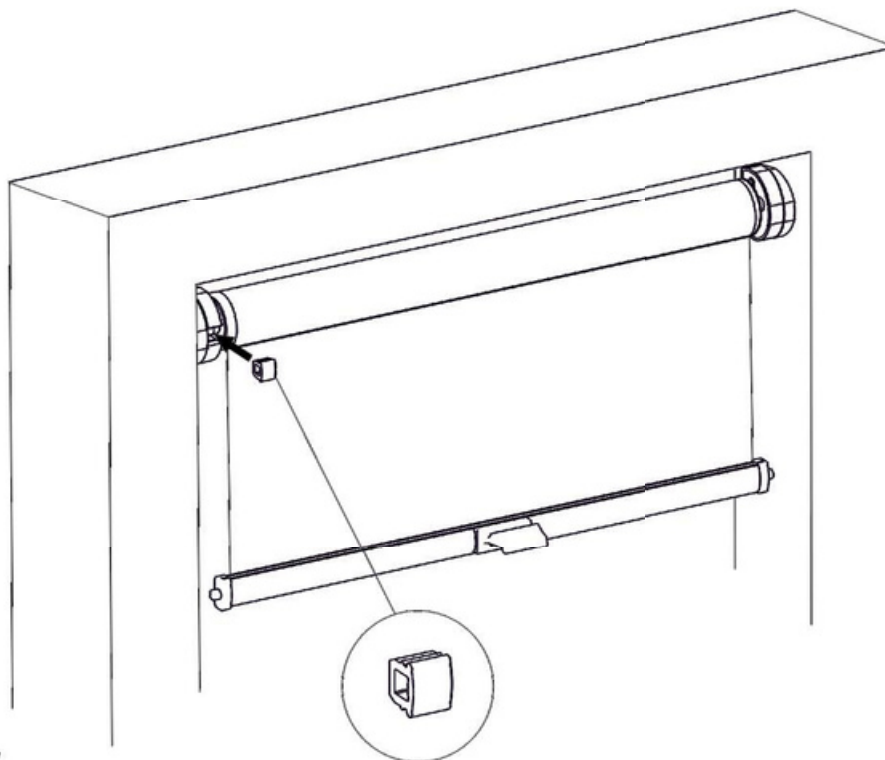


### Step IV

Screw the hooks to the window frame on the left and right at the height at which the blind will be rolled out.  
3 different blind stop positions can be set.  
Each pair of hooks (left and right) must be installed at the same height.

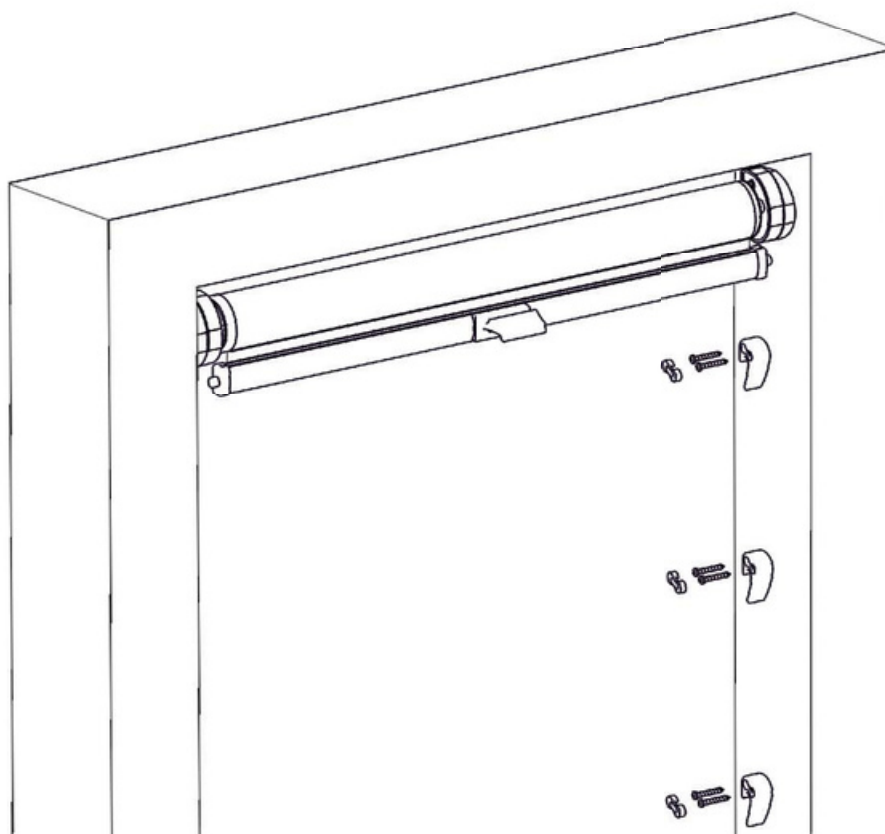

The hooks should be placed approx . 1 cm from the glass!

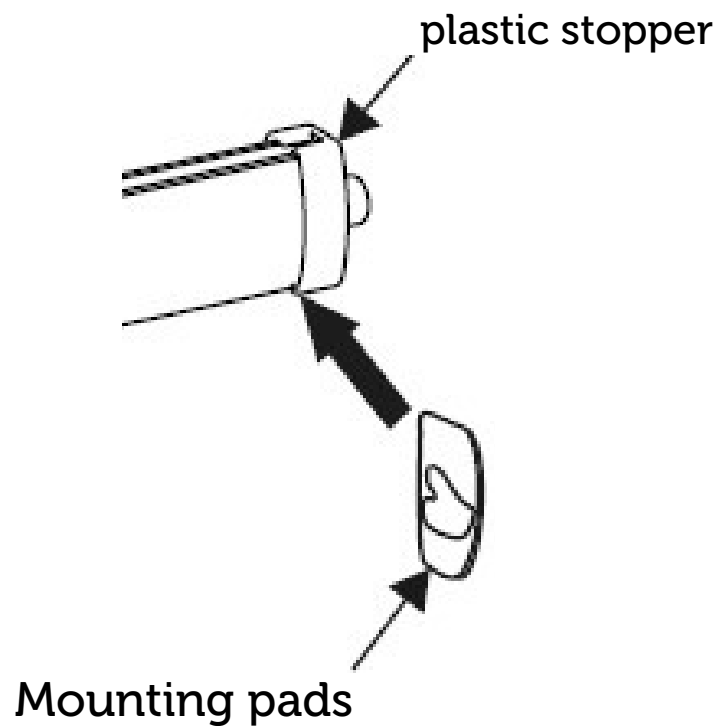

## IMPORTANT !!!

If the lower bar is too narrow, slide out the plastic plugs on the left and right side. Insert black spacers under plugs and push them back in.