


How to use Smart Blinds app

Google Play	08:31 🗭 🎔·		98:32 🏾 🎔 • device control	 ▲ ▲ 	18:45	scan list	tt ⊿/ 69% 8
Pobierz W App Store	Allow Blind Engine to access this device's location? Allow all the time Allow only while using the ap Deny		no device connected now, please add de	vice			
	Allow to access this device	e's	Verice control scene control s	trol	III Choose your (if you have a	a few, tur	n the other
Search: "smartblinds". Turn the engine on as said in attached instruction.	location (it's necessary for the blind and for bluetooth work)				engine on af to the app).	ter adding	g last blind
adding device guide	<pre>adding device guide</pre>		blind setting	59% 🗎	< dev	vice control	•••
		De	evice name setting	>			
5.Remove the teeth where from the cord or chains come out on cover plate; then lock the cover up	5.Remove the teeth where from the cord or c	hains Bl	lind style setting	>			
protection teeth	Blind:input blind passwor	d C	hange password	>			
Car	CANCEL	OK bl	ind direction setting	>			
0	8	u u	pper limit setting	>			
6 .Connect the solar panel or sensor to blind engine;	6 .Connect the solar panel or sensor to blind		ottom limit setting	~			
Please pay attention the wires in case wires wrapping.	Please pay attention the wires in case wires w	rapping.	loving speed setting	~			
correct installation	1 2 3		ot/Continuous setting	>	battery:32%		connected
	4 5 6		ind timing list	>			M
	7 8 9	$\overline{\mathbf{X}}$	elete device	>	Open	Stop	Close
bline engine install correctly, next step	, 0 .	✓ fa	actory default reset	>			
Press: next step.	Put in the password: 5555	Т	he blind setting appear	S.	Blind setting the top right	gs can be corner	found in
							_



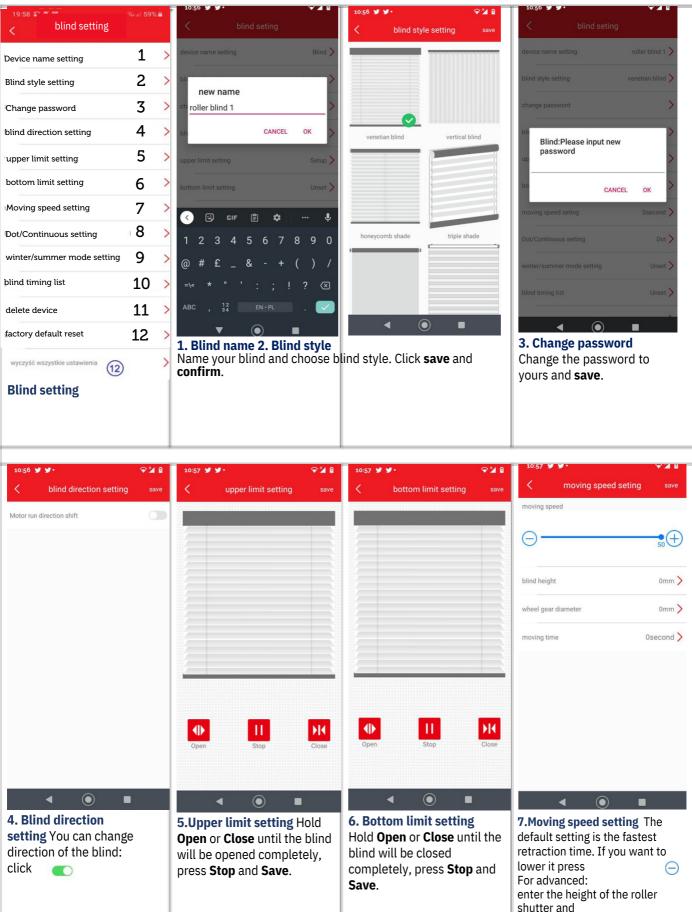

adjust the retraction time to your own preferences.

order to

diameter of the mechanism in



10.5/ 9 9	19:58 🖬 👘 🖏 🖏 🖏 S9% 🗎 .	10:59 🗑 🖗 •	10:59 🖉 🖉 •
C Dot/Continuous setting save	< blind setting	Solution of the second seco	C blind timing setting save
Dot/continuous Move shift	Device name setting		Set position
	Blind style setting		
	Change password		
	blind direction setting		
	upper limit setting		
	bottom limit setting		Set timing
	Moving speed setting	not timing setting, please add timing	05
	Dot/Continuous setting		07
	winter/summer mode setting		08 00 09 01
	blind timing list		10 02 11 03
	delete device		duplication >
	factory default reset	◀ () ■	
8. Dot/continuous setting This setting determines whether each touch of Open and Close will cause the roller shutter to move, or whether a short hold will be necessary.	9. Winter/summer mode This setting is linked to the light sensor in the solar panel*: if you do not have one you do not need to do anything. * instruction is available at Smartblinds.com	10. Timing list allow you to set the time for opening or closing the roller shutter. To start, press	10. Timing setting Set the position of the roller blind by sliding Select the exact time and press duplicate to select days.
🗸 date choose ок	11:00 y y · · · · · · · · · · · · · · · · ·	11:00 y y · · · · · · · · · · · · · · · · ·	11:00 🖉 🕊 · · · · · · · · · · · · · · · · · ·
sunday	timing 1	timing 1	timing 1
monday			timing 2
tuesday			
wednesday			timing 3
thurday		timing operation	timing 4
friday		edit	
saturday		delete	
10.Timing setting Select the days and confirm.	10. Timing setting To activate the timer press:	10. Timing setting To edit or delete a timer, hold your finger on its name for longer.	To edit/delete, press and hold your finger longer on the timer in question.

